



Owner: ØkoTømerer.dk ApS No.: MD-22122-EN_rev1 Issued: 24-02-2022

Issued: 24-02-2022 Revision: 13-09-2024 Valid to: 24-02-2028

3rd PARTY **VERIFIED**

EPD

VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804







Owner of declaration

ØkoTømerer.dk ApS Mondrupsvej 8, Stavtrup VAT no.: 41275634



Programme

EPD Danmark www.epddanmark.dk



☐ Industry EPD☒ Product EPD

⊠ Product EPD

Declared product(s)

BurntWood ReUse with or without surface treatment

Number of declared datasets/product variations: 2

Production site

Sylbækvej 2, 8230 Aarhus, Denmark

Product(s) use

Façade cladding for buildings

Declared/ functional unit

1 m2 BurntWood ReUse with surface treatment 1m2 BurntWood ReUse without surface treatment

Year of production site data (A3)

Period for data collection 2022-2023

EPD version

Revision no. 1, 13-09-2024: linseed oil has been replaced with water glass (silicate) and kraft paper is also no longer used in sales packaging.

Issued: 24-02-2022

Valid to: 24-02-2028

Basis of calculation

This EPD is developed in accordance with the European standard EN 15804+A2.

Comparability

EPDs of construction products may not be comparable if they do not comply with the requirements in EN 15804. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database.

Validity

This EPD has been verified in accordance with ISO 14025 and is valid for 5 years from the date of issue.

Use

The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the environmental performance of buildings.

EPD type

⊠Cradle-to-gate with modules C1-C4 and D

 $\Box \text{Cradle-to-gate}$ with options, modules C1-C4 and D

 \square Cradle-to-grave and module D

□Cradle-to-gate

□Cradle-to-gate with options

CEN standard EN 15804 serves as the core PCR

Independent verification of the declaration and data, according to EN ISO 14025

☐ internal

Third party verifier:

Kim Christiansen

Martha Katrine Sørensen EPD Danmark

Life	Life cycle stages and modules (MND = module not declared)															
	Produc	t		ruction cess	Use					End of life				Beyond the system boundary		
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, recovery and recycling potential
A1	A2	А3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	С3	C4	D
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X





Product information

Product description

The main product components are shown in the table below.

Table 1 BurntWood ReUse with surface treatment

Material	Weight-% of declared product
Additive	1,72%
Conventional Wood	14,93%
Reused Wood	81,43%
Nails	1,92%

Table 2 BurntWood ReUse without surface treatment

Material	Weight-% of declared product
Conventional Wood	15,19%
Reused Wood	82,86%
Nails	1,95%

Product packaging:

The composition of the sales- and transport packaging of the product is shown in the table below.

Hazardous substances

Both the BurntWood ReUse with or without surface treatment does not contain substances listed on the "Candidate List of Substances of Very High Concern for 3armonized3on"

(http://echa.europa.eu/candidate-list-table)

Essential characteristics

BurntWood are covered by harmonized technical specification EN 350:2016

Further technical information can be obtained by contacting the manufacturer or on the manufacturers website:

https://www.burntwood.dk/data/

Table 3 BurntWood ReUse with surface treatment

Material	Weight-% of packaging						
Euro pallet	99,5%						
PET strap	0,5%						

Table 4 BurntWood ReUse without surface treatment

Material	Weight-% of packaging
Euro pallet	99,5%
PET strap	0,5%


Representativity

This declaration, including data collection and the modeled foreground system including results, represents the production from a single producer and a single production site. The production site is located in Aarhus, Denmark. The end-of-life represents disposal in Danmark. Background data are based on Ecoinvent 3.8 database and are less than 10 years old. Generally, the used background datasets are of high quality, and the majority of the datasets are only a couple of years old.

Reference Service Life (RSL)

No RSL is declared. This EPD is based on a cradle to gate with modules C1-4 and D and does not include the use stage.

Picture of product







LCA background

Declared unit

The LCI and LCIA results in this EPD relates to 1 $\ensuremath{\text{m}^2}$ BurntWood ReUse with or without surface treatment.

Tabel 5 BurntWood ReUse with surface treatment

Name	Value	Unit
Declared unit	1	m ²
Weight per declared unit	20,36	kg/m²
Density (pinewood)	430	Kg/M3
Conversion factor to 1 kg.	0,05	-

Not defined

Table 6 BurntWood ReUse without surface treatment

Name	Value	Unit
Declared unit	1	m ²
Weight per declared unit	20,01	kg/m²
Density (pinewood)	430	Kg/m3
Conversion factor to 1 kg.	0,05	_

Guarantee of Origin - certificates

Foreground system:

No use of certified green energy. Average energy mix from is used in production.

Background system:

No use of certified green energy.

Upstream processes are modelled using national energy mix. Downstream processes are modelled using national energy mix.

Functional unit


No defined

PCR

This EPD is developed according to the core rules for the product category of construction products in EN 15804+A2 and the cPCR 16485.





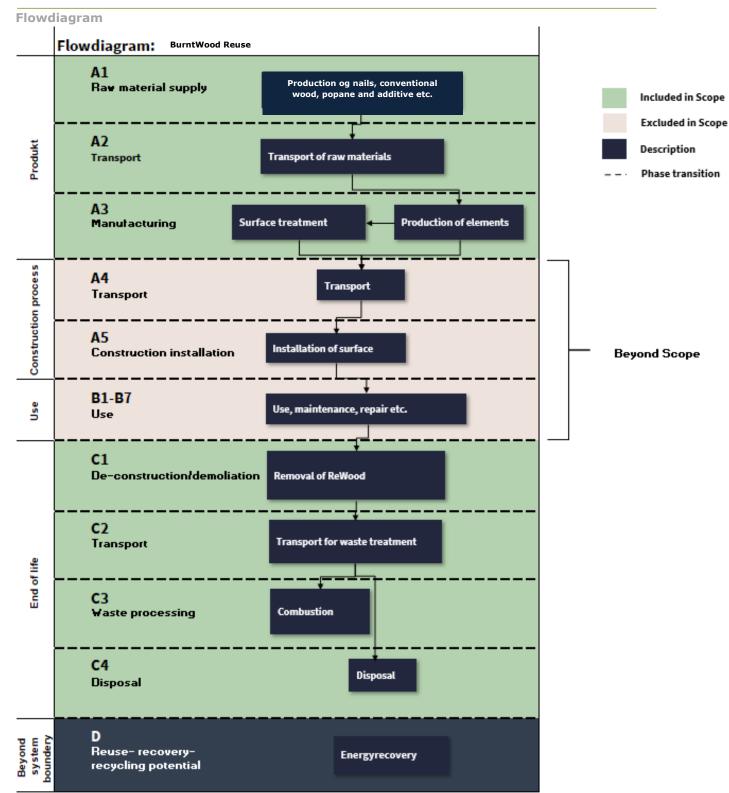





System boundary

This EPD is based on a cradle-to-gate LCA with modules C1-C4 and D, in which 100 weight-% has been accounted for.

The general rules for the exclusion of inputs and outputs follows the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes.

Product stage (A1-A3) includes:

A1 – Extraction and processing of raw materials

A2 - Transport to the production site

A3 - Manufacturing processes

The product stage comprises the acquisition of all raw materials, products and energy, transport to the production site, packaging and waste processing up to the "end-of-waste" state or final disposal. The LCA results are declared in aggregated form for the product stage, which means, that the sub-modules A1, A2 and A3 are declared as one module A1-A3.

End of Life (C1-C4) includes:

End-of-life includes a Danish scenario for waste processing of oiled and waste wood and scrap steel for nails. According to the Danish Environment Agency, oiled and waste wood is treated as combustible waste, which means that the material is incinerated as waste. Since the nails are embedded in the elements they are sent to incineration as well.

C1 - Deconstruction demolition

C2 - Transport to waste processing

C3 - Waste processing

C4 - Disposal

For the BurntWood ReUse with surface treatment, it has no influence on the deconstruction or demolition of the wood, and none of the materials is disposed as part of C4 module of in either products. All material components are treated in the C3 module.

Re-use, recovery and recycling potential (D) includes:

As the materials gets incinerated, electricity and heat will be produced, which replaces electricity and heat. The produced electricity replaces the Danish electricity mix and the heat produced is replacing natural gas. The energy and heat potential from the reused wood in both products is included according to cPCR 16485.





LCA results

				EN	IVIRONI	MENTAL	IMPAC	TS PER	m²				
		Bu	rntWood I	ReUse wit	hout surfa	ce treatm	ent	E	BurntWood	d ReUse w	ith surfac	e treatme	nt
Indicator	Unit	A1-A3	C1	C2	С3	C4	D	A1-A3	C1	C2	С3	C4	D
GWP-total	kg CO ₂ eq.	-3,97E+01	0,00E+00	2,88E-01	3,63E+01	0,00E+00	-1,24E+00	-3,88E+01	0,00E+00	2,94E-01	3,65E+01	0,00E+00	-1,34E+00
GWP-fossil	kg CO₂ eq.	2,78E+00	0,00E+00	2,88E-01	3,01E-01	0,00E+00	-1,24E+00	3,64E+00	0,00E+00	2,94E-01	4,84E-01	0,00E+00	-1,34E+00
GWP- biogenic	kg CO₂ eq.	-4,25E+01	0,00E+00	2,64E-04	3,60E+01	0,00E+00	3,43E-04	-4,25E+01	0,00E+00	2,69E-04	3,60E+01	0,00E+00	3,71E-04
GWP-luluc	kg CO₂ eq.	1,10E-02	0,00E+00	1,42E-04	8,22E-05	0,00E+00	-1,71E-04	8,94E-03	0,00E+00	1,45E-04	8,62E-05	0,00E+00	-1,85E-04
ODP	kg CFC 11 eq.	2,04E-07	0,00E+00	6,27E-09	5,29E-09	0,00E+00	-4,35E-08	2,17E-07	0,00E+00	6,40E-09	5,82E-09	0,00E+00	-4,73E-08
AP	mol H ⁺ eq.	1,17E-02	0,00E+00	6,29E-04	3,19E-03	0,00E+00	-3,63E-03	1,41E-02	0,00E+00	6,43E-04	3,30E-03	0,00E+00	-3,93E-03
EP- freshwater	kg P eq.	7,72E-04	0,00E+00	2,05E-05	1,38E-04	0,00E+00	-3,83E-04	8,19E-04	0,00E+00	2,09E-05	1,51E-04	0,00E+00	-4,14E-04
EP-marine	kg N eq.	3,43E-03	0,00E+00	1,59E-04	1,70E-03	0,00E+00	-7,49E-04	3,70E-03	0,00E+00	1,62E-04	1,75E-03	0,00E+00	-8,12E-04
EP- terrestrial	mol N eq.	3,65E-02	0,00E+00	1,61E-03	1,63E-02	0,00E+00	-7,74E-03	4,05E-02	0,00E+00	1,65E-03	1,68E-02	0,00E+00	-8,39E-03
POCP	kg NMVOC eq.	1,53E-02	0,00E+00	9,77E-04	4,16E-03	0,00E+00	-2,35E-03	1,62E-02	0,00E+00	9,98E-04	4,28E-03	0,00E+00	-2,55E-03
ADPm ¹	kg Sb eq.	1,22E-05	0,00E+00	9,41E-07	5,25E-07	0,00E+00	-7,09E-06	1,99E-05	0,00E+00	9,61E-07	5,48E-07	0,00E+00	-7,67E-06
ADPf ¹	MJ	4,27E+01	0,00E+00	4,09E+00	2,62E+00	0,00E+00	-1,98E+01	5,30E+01	0,00E+00	4,18E+00	2,74E+00	0,00E+00	-2,15E+01
WDP ¹	m ³ world eq. Deprived	4,90E-01	0,00E+00	1,69E-02	-2,34E-01	0,00E+00	-1,51E-01	5,05E-01	0,00E+00	1,72E-02	-2,11E-01	0,00E+00	-1,64E-01
	GWP-tota						l al Warming use and land						
Caption	biogenic; GWP-luluc = Global Warming Potential – land use and land use change; ODP = Ozone Depletion; AP = Acidifcation; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels WDP = water use										errestrial;		
Disclaimer	¹ The resu	ılts of this e	nvironment	al indicator	shall be use		as the unce		these resu	lts are high	or as there	is limited e	xperience





			ADD	ITIONA	AL ENVI	RONME	NTAL I	MPACT	S PER n	n²				
	BurntWood ReUse without surface treatment							BurntWood ReUse with surface treatment						
Parameter	Unit	A1-A3	C1	C2	СЗ	C4	D	A1-A3	C1	C2	С3	C4	D	
PM	[Disease incidence]	3,23E-07	0,00E+00	2,14E-08	3,56E-08	0,00E+00	-1,41E-08	3,43E-07	0,00E+00	2,19E-08	3,65E-08	0,00E+00	-1,53E-08	
IRP ²	[kBq U235 eq.]	2,93E-01	0,00E+00	5,53E-03	3,15E-03	0,00E+00	-2,12E-01	2,93E-01	0,00E+00	5,65E-03	3,43E-03	0,00E+00	-2,30E-01	
ETP-fw ¹	[CTUe]	3,37E+01	0,00E+00	4,04E+00	4,71E+00	0,00E+00	-5,10E+00	4,43E+01	0,00E+00	4,13E+00	6,21E+00	0,00E+00	-5,52E+00	
HTP-c ¹	[CTUh]	1,21E-08	0,00E+00	2,62E-10	1,66E-09	0,00E+00	-5,52E-10	6,92E-09	0,00E+00	2,68E-10	1,76E-09	0,00E+00	-5,98E-10	
HTP-nc ¹	[CTUh]	6,42E-08	0,00E+00	5,80E-09	7,77E-08	0,00E+00	-2,46E-08	7,90E-08	0,00E+00	5,93E-09	8,12E-08	0,00E+00	-2,66E-08	
SQP ¹	-	1,10E+03	0,00E+00	2,47E+00	8,15E-01	0,00E+00	-2,88E+00	8,84E+02	0,00E+00	2,52E+00	8,84E-01	0,00E+00	-3,12E+00	
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality													
	¹ The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									limited				
Disclaimers ² This impact category deals mainly with the eventual impact of low dose ionizing radiation on hur not consider effects due to possible nuclear accidents, occupational exposure nor due to radioacti Potential ionizing radiation from the soil, from radon and from some construction materials in the soil of the soil o							o radioactiv	e waste di	sposal in u	nderground	d facilities.			

					RE	SOURCE	USE PI	ER m ²								
		BurntWood ReUse without surface treatment							BurntWood ReUse with surface treatment							
Parameter	Unit	A1-A3	C1	C2	С3	C4	D	A1-A3	C1	C2	С3	C4	D			
PERE	[MJ]	1,91E+02	0,00E+00	6,44E-02	6,54E-02	0,00E+00	-9,06E-01	1,51E+02	0,00E+00	6,58E-02	6,94E-02	0,00E+00	-9,81E-0			
PERM	[MJ]	7,90E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,06E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
PERT	[MJ]	2,70E+02	0,00E+00	6,44E-02	6,54E-02	0,00E+00	-9,06E-01	4,58E+02	0,00E+00	6,58E-02	6,94E-02	0,00E+00	-9,81E-01			
PENRE	[MJ]	4,27E+01	0,00E+00	4,09E+00	2,62E+00	0,00E+00	-1,98E+01	5,30E+01	0,00E+00	4,18E+00	2,74E+00	0,00E+00	-2,15E+01			
PENRM	[MJ]	4,82E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,17E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
PENRT	[MJ]	4,32E+01	0,00E+00	4,09E+00	2,62E+00	0,00E+00	-1,98E+01	5,39E+01	0,00E+00	4,18E+00	2,74E+00	0,00E+00	-2,15E+01			
SM	[kg]	1,66E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,66E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
RSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
NRSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
FW	[m³]	2,53E-02	0,00E+00	5,89E-04	-4,42E-03	0,00E+00	-1,90E-02	2,59E-02	0,00E+00	6,01E-04	-4,04E-03	0,00E+00	-2,06E-02			
Caption	renev	wable primo on renewa	ary energy ble primary	resources energy ex	used as ra ccluding no	w materials n renewab	s; PERT = T	Total use o energy res	f renewable ources use	e primary e d as raw m	energy reso naterials; P	I ils; PERM = ources; PEN ENRM = Us	IRE = Use se of non			

renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM =





Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water

				WASIE	CATEGO	RIES AI	יוטט עוי	POT FLC	VVS PER	C III-					
		Bu	rntWood I	ReUse witl	nout surfa	ce treatm	ent	BurntWood ReUse with surface treatment							
Parameter	Unit	A1-A3	C1	C2	СЗ	C4	D	A1-A3	C1	C2	СЗ	C4	D		
HWD	[kg]	1,95E-04	0,00E+00	2,60E-05	1,31E-05	0,00E+00	-4,75E-05	2,41E-04	0,00E+00	2,66E-05	1,39E-05	0,00E+00	-5,16E-0		
NHWD	[kg]	1,10E+00	0,00E+00	2,03E-01	2,34E-01	0,00E+00	-4,46E-02	1,27E+00	0,00E+00	2,07E-01	2,53E-01	0,00E+00	-4,83E-02		
RWD	[kg]	7,45E-05	0,00E+00	1,34E-06	7,80E-07	0,00E+00	-5,36E-05	7,41E-05	0,00E+00	1,37E-06	8,51E-07	0,00E+00	-5,80E-0		
CRU	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
MFR	[kg]	1,38E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,61E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
MER	[kg]	0,00E+00	0,00E+00	0,00E+00	2,00E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,00E+01	0,00E+00	0,00E+00		
EEE	[MJ]	0,00E+00	0,00E+00	0,00E+00	3,43E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,48E+01	0,00E+00	0,00E+00		
EET	[MJ]	0,00E+00	0,00E+00	0,00E+00	6,85E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,95E+01	0,00E+00	0,00E+00		
Caption	HWD) = Hazard				n hazardou recycling; I					•	; CRU = Co nergy	mponent		

	BIOGENIC CARBON CONTENT PER m ²											
Parameter	Unit	At the fac	BurntWood ReUse with surface treatment									
Biogenic carbon content in product	[kg C]	9,81	9,81									
Biogenic carbon content in accompanying packagaing	[kg C]	1,09	1,09									
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO ₂											

MD-22122-EN_rev1 | ØkoTømerer.dk ApS| Page 9 of 12





Additional information

LCA interpretation

For the BurntWood ReUse without surface treatment the process and raw materials which are of most important are the conventional wood due to harvesting in forrest and processes from the sawnmill also the EUR pallet due to its composition of wood, nails and glue. For the BurntWood ReUse with surface treatment the process and raw material of most important is mainly conventional wood and the additiveused for the surface treatment. For the additive it is due to the energy use in the background data..

Technical information on scenarios

BurntWood ReUse with BurntWood surface treatment End of life (C1-C4)

Scenario information	Value	Unit
Collected separately	0	kg
Collected with mixed waste	0	kg
For reuse	0	kg
For recycling	0	kg
For energy recovery	20,36	kg
For final disposal	0	kg
Assumptions for scenario development	0	As appropriate

BurntWood ReUse without BurntWood surface treatment End of life (C1-C4)

Scenario information	Value	Unit
Collected separately	0	kg
Collected with mixed waste	0	kg
For reuse	0	kg
For recycling	0	kg
For energy recovery	20,01	kg
For final disposal	0	kg
Assumptions for scenario development	0	As appropriate

BurntWood ReUse without Burntwood surface treatment Re-use, recovery and recycling potential (D)

Scenario information/Materiel	Value	Unit
Electricity from incineration	5,37	MJ
Heat from incineration	10,61	MJ

BurntWood ReUse with Burntwood surface treatment Re-use, recovery and recycling potential (D)

Scenario information/Materiel	Value	Unit
Electricity from incineration	5,81	MJ
Heat from incineration	11,61	MJ





Indoor air

The EPD does not give information on release of dangerous substances to indoor air because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A1 chapter 7.4.1.

Soil and water

The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A1 chapter 7.4.2.





References

Publisher	www.epddanmark.dk
Programme operator	Danish Technological Institute Buildings & Environment Gregersensvej DK-2630 Taastrup www.teknologisk.dk
LCA-practitioner	Lasse Langstrup Hägerstrand Transition ApS Vester Farimagsgade 6, 4. sal 1606 København V e-mail: lasse@transition.nu
LCA software /background data	SimaPro 9.5.0.0. / Ecoinvent v.3.9 Database
3 rd party verifier	Kim Christiansen kimconsult.dk Marienborg Alle 91C 2860 Søborg

General programme instructions

General Programme Instructions, version 2.0, spring 2020 www.epddanmark.dk

EN 15804

DS/EN 15804 + A2:2019 - "Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products"

EN 15942

DS/EN 15942:2011 – " Sustainability of construction works – Environmental product declarations – Communication format business-to-business"

ISO 14025

DS/EN ISO 14025:2010 – " Environmental labels and declarations – Type III environmental declarations – Principles and procedures"

ISO 14040

DS/EN ISO 14040:2008 – " Environmental management – Life cycle assessment – Principles and framework"

ISO 14044

DS/EN ISO 14044:2008 – " Environmental management – Life cycle assessment – Requirements and guidelines"

ISO 16485

DS/EN 16485 Round and sawn timber – Environmental Product Declarations – Product category rules for wood and wood-based products for use in contructions