



Kvadra MD-23 07-07-09-04-07-07-

Issued: Revision: Valid to: MD-23115-EN\_re<sup>v</sup> 07-07-2023 09-04-2025 07-07-2028

## 3<sup>rd</sup> PARTY **VERIFIED**



VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804





<b>Owner of declaration</b> Kvadrat A/S Lundbergsvej 10 8400 Ebeltoft, Denmark	kvadrat	Issued: 07-07-2023 Basis of calculation				
VAT no. DK-45 99 85 17		standard EN 15804+	d in accordance with the Europear A2.			
Programme EPD Danmark www.epddanmark.dk	Kepddanmark	if they do not comp	products may not be comparable oly with the requirements in EN r not be comparable if the datasets			
□ Industry EPD ⊠ Product EPD			bed in accordance with EN 15804 and systems are not based on the			
Declared product(s) 45% new wool, 45% recycled wool, 10	0% nylon – Huddersfield, UK		verified in accordance with ISC r 5 years from the date of issue.			
65% new wool, 23% recycled wool, 12 Number of declared datasets/product	scientifically based	<b>Use</b> The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the				
Production sites Huddersfield, United Kingdom		environmental perfor EPD type ⊠Cradle-to-gate with	mance of buildings.			
<b>Product(s) use</b> Kvadrat produces quality contemporar and curtains.	y textiles for use in upholster	Cradle-to-grave and Cradle-to-gate	<ul> <li>Cradle-to-gate with options, modules C1-C4 and D</li> <li>Cradle-to-grave and module D</li> <li>Cradle-to-gate</li> <li>Cradle-to-gate with options</li> </ul>			
<b>Declared/ functional unit.</b> 1 kg of woven textile		CEN standard EN	15804 serves as the core PCR			
Year of production site data (A3) 2021			tion of the declaration and data, ng to EN ISO 14025			
		— Dinternal	🛛 external			
<b>EPD version</b> 3 <sup>rd</sup> version: new products, energy and	waste corrections.		d party verifier:			
			Aalborg University, BUILD			

Mathe Jorensen

Martha Katrine Sørensen EPD Danmark

Life	Life cycle stages and modules (MND = module not declared)															
	Produc	t	Constr proc	ruction cess		Use			End of life				Beyond the system boundary			
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, ecovery, and recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	x



# Product information

#### **Product description**

The main product components are shown in the table below.

Material	Weight-% of declared product
Wool	45 - 65%
Recycled wool	23 – 45%
Nylon	10 - 12%

#### **Product packaging:**

The composition of the sales- and transport packaging of the product is shown in the table below.

Material	Weight-% of packaging
Carton	63%
PE foil	35%
Wooden pallets	2%

#### Representativity

This declaration, including data collection and the modeled foreground system including results, represents the production of 1 kg of woven textile on the production site located in Huddersfield, United Kingdom. Product specific data are based on average values collected in the year 2021. Background data are based on the GaBi database version 2022.2 and the EcoInvent 3.8 database. Data are less than 10 years old. Generally, the used background datasets are of high quality, and the majority of the datasets are only a couple of years old.

#### Hazardous substances

The products declared within this EPD do not contain substances listed on the "Candidate List of Substances of Very High Concern for Authorisation."

(http://echa.europa.eu/candidate-list-table)

#### **Essential characteristics**

The products in this EPD are not covered by harmonized technical specifications. Declaration of performance according to EU regulation 305/2011 is available for all declared product variations.

Further technical information can be obtained by contacting the manufacturer or on the manufacturer's website: <a href="http://www.kvadrat.dk/en">www.kvadrat.dk/en</a>

#### **Reference Service Life (RSL)**

Kvadrat offers 10 years guarantee for the majority of its textile products. The actual service life of Kvadrat textile depends on a wide range of various impact factors such as the allocation of the application area to the use class, maintenance, intensity of use and functional purpose. Most often Kvadrat textiles are applied for building and transportation related purposes.

Therefore, technical service life cannot be defined for Kvadrat textiles.

Kvadrat product specific textile warranty are disclosed in the Technical Specifications of each product.



## **Table of products**

	Products from Kvadrat covered in this EPD										
Supplier	Country	Product name	Product composition	kg pr m <sup>2</sup>							
Huddersfield	UK	Re-wool	45% new wool, 45% recycled wool, 10% nylon	0,386							
Huddersfield	UK	Sabi	65% new wool, 23% recycled wool, 12% nylon	0,400							

## **Picture of product(s)**





# LCA background

#### Declared unit.

The LCI and LCIA results in this EPD relates to environmental impacts caused by the production and end-of-life of 1 kg of woven textiles.

Name	Value	Unit
Declared unit	1	Kg
Conversion factor to 1 kg.	1	-

**Functional unit** 


Not defined.

#### PCR

This EPD is developed according to the core rules for the product category of construction products in EN 15804+A2:2019.

#### Flowdiagram

The flow diagram below presents the main processes included in the life cycle of the woven textiles.

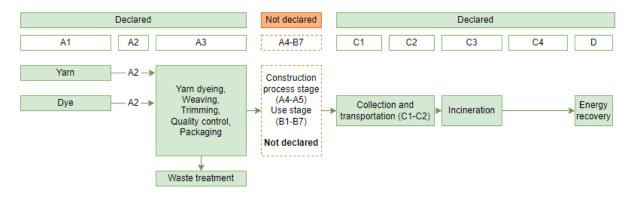

## **Guarantee of Origin – certificates**

Foreground system:

No "Guarantee of Origin" certificates are used in the manufacturing. Consumption of electricity is modelled with residual electricity grid mix. Consumption of heat is modelled with average data, representative for the geographical area.

Background system:

Other processes upstream and downstream from the production is modelled with processes from the GaBi background database that is based on average data.



#### System boundary

This EPD is based on a cradle-to-gate LCA with modules C1-C4 and D, in which 100 weight-% has been accounted for.

The general rules for the exclusion of inputs and outputs follows the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes.

## Product stage (A1-A3) includes:

- A1 Extraction and processing of raw materials
- A2 Transport to the production site
- A3 Manufacturing processes

The product stage comprises the acquisition of all raw materials, products and energy, transport to the production site, packaging, and waste processing up to the "end-of-waste" state or final disposal. The LCA results are declared in aggregated form for the product stage, which means, that the sub-modules A1, A2 and A3 are declared as one module A1-A3.

The manufacturing of the woven textiles is handled by suppliers located in the United Kingdom.

The yarns used for the textiles are prepared and assembled prior to the weaving. In this step, the warp yarns are wrapped around a rotating drum, creating a warp with the desired length. In the weaving process, the woven fabrics are formed using a loom, interlacing the lengthwise threads, known as warp yarns, and the crosswise threads, known as weft yarns. Subsequently, the fabric is trimmed, quality controlled, rolled-up, packaged, and transported to Kvadrat headquarters in Ebeltoft, Denmark.

The yarns used in the products are dyed using roughly four different dyeing methods, with some yarns being delivered pre-dyed others being dyed inhouse.

(1) For some of the synthetic textiles, dyestuff is added directly during the manufacturing of the yarn and before the yarn has been extruded (dope dyed). In other cases, (2) the dyestuff is added to the fibres before they are spun into a yarn Dyestuff is either added to the loose fibres (stock dyed) or to combed wool sliver (top dyed). A third option used in both the production of synthetic and natural textiles includes the (3) dyeing of the finished yarns (yarn dyed), which are either sent to an external dyeing house before they arrive at the production sites of the suppliers of this EPD or which are dyed inhouse at the production sites of this EPD. Alternatively, (4) the dyestuff is applied to the finished woven textile (piece dyed).

In the case of the yarn dyeing technology the yarn is wound on perforated cores. From here, the dye flows through the yarn package, penetrating the fibres into the core of the yarn. The yarn dyeing method is both handled internally and externally, depending on the specific supplier. This process requires a significant amount of steam and water.

## End of Life (C1-C4) includes:

C1 – Deconstruction: There are no impacts associated with C1 as the textiles – once they are incorporated into either a curtain or upholstery – are deconstructed manually and without the need for any additional materials and/or machinery. This lifecycle stage is set to 0.

C2 – Transport to waste processing: A general scenario for the transport of waste to waste handling site is used, and this single transport scenario is applied to the end-of-life for all textiles unaffected by their site of origin or material composition.

This transport distance is set to 40 km, based on average distance to waste handling sites.

C3 – Waste processing: The textiles are modelled as one homogenous product that will/cannot be separated at the end-of-life, instead they are all modelled as 1 kg of textile being sent to municipal waste incineration, with each product falling under the same scenario regardless of material composition or site of origin.

End-of-life is modelled using a 100% incineration scenario.



# Re-use, recovery, and recycling potential (D) includes:

Module D includes the potential in energy recovery arising from the incineration of the textiles at the end-of-life. Modelled with average European data for electricity and district heating.



# LCA results

Huddersfield, United Kingdom - 45% recycled wool, 45% virgin wool, 10% nylon

45% Recycled wool, 45% virgin wool & 10% nylon

#### 45% Recycled wool, 45% virgin wool & 10% nylon

		ENVIRO	NMENTAL IM	PACTS PER kg	j textile					
Parameter	Enhed	A1-A3	C1	C2	С3	C4	D			
GWP-total	[kg CO <sub>2</sub> eq.]	9,11E+00	0,00E+00	4,75E-03	1,74E+00	0,00E+00	-6,85E-01			
GWP-fossil	[kg CO <sub>2</sub> eq.]	6,45E+00	0,00E+00	4,71E-03	4,71E-01	0,00E+00	-6,80E-01			
GWP-bio	[kg CO <sub>2</sub> eq.]	2,65E+00	0,00E+00	4,92E-07	1,27E+00	0,00E+00	-4,60E-03			
GWP-luluc	[kg CO <sub>2</sub> eq.]	1,39E-02	0,00E+00	4,36E-05	5,19E-06	0,00E+00	-1,43E-04			
ODP	[kg CFC 11 eq.]	1,43E-10	0,00E+00	6,13E-16	1,98E-13	0,00E+00	-4,67E-12			
AP	[mol H <sup>+</sup> eq.]	2,70E-02	0,00E+00	6,45E-06	1,42E-03	0,00E+00	-1,39E-03			
EP-fw	[kg P eq.]	3,28E-04	0,00E+00	1,72E-08	5,39E-08	0,00E+00	-2,63E-06			
EP-mar	[kg N eq.]	4,15E-03	0,00E+00	2,26E-06	6,47E-04	0,00E+00	-3,68E-04			
EP-ter	[mol N eq.]	1,17E-01	0,00E+00	2,70E-05	7,33E-03	0,00E+00	-3,82E-03			
POCP	[kg NMVOC eq.]	1,06E-02	0,00E+00	5,60E-06	1,66E-03	0,00E+00	-9,77E-04			
ADP-mm <sup>1</sup>	[kg Sb eq.]	1,19E-06	0,00E+00	3,10E-10	1,82E-09	0,00E+00	-1,06E-07			
ADP-fos1	[MJ]	8,73E+01	0,00E+00	6,41E-02	6,71E-01	0,00E+00	-9,67E+00			
WDP <sup>1</sup>	[m <sup>3</sup> ]	3,64E+00	0,00E+00	5,69E-05	1,99E-01	0,00E+00	-1,09E-01			
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification;         EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use									
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									
	The numbers are	declared in scientifi		+02. This number c 1,12*10 <sup>-11</sup> or 0,000		ls: 1,95*10 <sup>∠</sup> or 195,	while 1,12E-11 is			

#### 45% Recycled wool, 45% virgin wool & 10% nylon

	ADDITIONAL ENVIRONMENTAL IMPACTS kg textile											
Parameter	Enhed	A1-A3	C1	C2	C3	C4	D					
PM	[Disease incidence]	2,13E-07	0,00E+00	4,71E-11	4,41E-09	0,00E+00	-1,12E-08					
IRP <sup>2</sup>	[kBq U235 eq.]	3,20E-01	0,00E+00	1,80E-05	3,89E-03	0,00E+00	-1,57E-01					
ETP-fw <sup>1</sup>	[CTUe]	2,81E+01	0,00E+00	4,56E-02	2,28E-01	0,00E+00	-3,56E+00					
HTTP-c <sup>1</sup>	[CTUh]	4,12E-09	0,00E+00	9,32E-13	5,06E-11	0,00E+00	-1,19E-10					
HTTP-nc <sup>1</sup>	[CTUh]	4,06E-07	0,00E+00	4,98E-11	4,88E-09	0,00E+00	-5,69E-09					
SQP <sup>1</sup>	-	7,13E+02	0,00E+00	2,68E-02	1,36E-01	0,00E+00	-9,58E+00					
Caption	PM = Particulat	e Matter emissions; toxicity – cancer	0	ation – human healt Human toxicity – no	,		HTP-c = Human					
	The numbers are	declared in scientifi		+02. This number o 1,12*10 <sup>-11</sup> or 0,000		s: 1,95*10² or 195,	while 1,12E-11 is					



<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

Disclaimers

<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

#### 45% Recycled wool, 45% virgin wool & 10% nylon

		RESSOU	RCE CONSUM	PTION PER k	g textile				
Parameter	Enhed	A1-A3	C1	C2	С3	C4	D		
PERE	[M]	9,57E+01	0,00E+00	4,67E-03	1,20E-01	0,00E+00	-5,86E+00		
PERM	[MJ]	6,01E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
PERT	[M]	1,02E+02	0,00E+00	4,67E-03	1,20E-01	0,00E+00	-5,86E+00		
PENRE	[M]	8,49E+01	0,00E+00	6,44E-02	6,72E-01	0,00E+00	-9,67E+00		
PENRM	[MJ]	2,45E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
PENRT	[M]	8,74E+01	0,00E+00	6,44E-02	6,72E-01	0,00E+00	-9,67E+00		
SM	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
RSF	[M]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
NRSF	[M]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
FW	[m³]	2,96E-01	0,00E+00	5,11E-06	4,70E-03	0,00E+00	-4,07E-03		
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy resources used as raw materials; PERT = Total use of non renewable primary energy resources; SM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; SME = Use Use of non renewable secondary fuels; SME = Use Use of non renewable secondary fuels; SME = Use Use of non renewable secondary fuels; SME = Use Use Of non renewable secondary fuels; SME = Use Use Of non renewable secondary fuels; SME = Use Use Of non renewable secondary fuels; SME = Use Use Of non renewable secondary fuels; SME = Use Of non renewable sec								
Disclaimer	The numbers are	declared in scientifi		+02. This number of 1,12*10 <sup>-11</sup> or 0,000		as: 1,95*10 <sup>2</sup> or 195,	while 1,12E-11 is		

#### 45% Recycled wool, 45% virgin wool & 10% nylon

	ADDITIONAL ENVIRONMENTAL IMPACTS kg textile											
Parameter	Enhed	A1-A3	C1	C2	С3	C4	D					
HWD	[kg]	6,86E-06	0,00E+00	1,99E-13	5,35E-11	0,00E+00	-1,34E-09					
NHWD	[kg]	1,92E-01	0,00E+00	9,81E-06	2,27E-02	0,00E+00	-1,86E-02					
RWD	[kg]	3,25E-03	0,00E+00	1,20E-07	2,49E-05	0,00E+00	-9,29E-04					
CRU	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00					
MFR	[kg]	1,06E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00					
MER	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00					
EEE	[M]	3,69E-02	0,00E+00	0,00E+00	3,11E+00	0,00E+00	0,00E+00					
EET	[M]	8,42E-02	0,00E+00	0,00E+00	5,59E+00	0,00E+00	0,00E+00					
Disclaimer		ardous waste dispos e-use; MFR = Mater	rials for recycling; N		energy recovery; El							

## 65% new wool, 23% recycled wool, 12% nylon

#### 65% new wool, 23% recycled wool, 12% nylon

	ENVIRONMENTAL IMPACTS PER kg textile											
Parameter	Enhed	A1-A3	C1	C2	С3	C4	D					
GWP-total	[kg CO <sub>2</sub> eq.]	1,19E+01	0,00E+00	4,75E-03	1,74E+00	0,00E+00	-6,85E-01					
GWP-fossil	[kg CO <sub>2</sub> eq.]	8,13E+00	0,00E+00	4,71E-03	4,71E-01	0,00E+00	-6,80E-01					
GWP-bio	[kg CO <sub>2</sub> eq.]	3,77E+00	0,00E+00	4,92E-07	1,27E+00	0,00E+00	-4,60E-03					
GWP-luluc	[kg CO <sub>2</sub> eq.]	1,93E-02	0,00E+00	4,36E-05	5,19E-06	0,00E+00	-1,43E-04					
ODP	[kg CFC 11 eq.]	1,52E-10	0,00E+00	6,13E-16	1,98E-13	0,00E+00	-4,67E-12					
AP	[mol H <sup>+</sup> eq.]	3,78E-02	0,00E+00	6,45E-06	1,42E-03	0,00E+00	-1,39E-03					
EP-fw	[kg P eq.]	4,72E-04	0,00E+00	1,72E-08	5,39E-08	0,00E+00	-2,63E-06					
EP-mar	[kg N eq.]	5,52E-03	0,00E+00	2,26E-06	6,47E-04	0,00E+00	-3,68E-04					
EP-ter	[mol N eq.]	1,64E-01	0,00E+00	2,70E-05	7,33E-03	0,00E+00	-3,82E-03					
POCP	[kg NMVOC eq.]	1,39E-02	0,00E+00	5,60E-06	1,66E-03	0,00E+00	-9,77E-04					
ADP-mm <sup>1</sup>	[kg Sb eq.]	1,64E-06	0,00E+00	3,10E-10	1,82E-09	0,00E+00	-1,06E-07					
ADP-fos <sup>1</sup>	[M]	1,05E+02	0,00E+00	6,41E-02	6,71E-01	0,00E+00	-9,67E+00					
WDP <sup>1</sup>	[m <sup>3</sup> ]	5,13E+00	0,00E+00	5,69E-05	1,99E-01	0,00E+00	-1,09E-01					
Caption	Potential - bioge EP-freshwater = Eutr	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification;         EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use										
Disclaimer		<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator. The numbers are declared in scientific notation, fx 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is										
			he same as 1,12*10 <sup>-11</sup> or				,126-1113					

#### 65% new wool, 23% recycled wool, 12% nylon

	<i>bii, 25 /i</i> recycled		VIRONMENTAL II	MPACTS kg te	extile						
Parameter	Enhed	A1-A3	C1	C2	C3	C4	D				
PM	[Disease incidence]	2,98E-07	0,00E+00	4,71E-11	4,41E-09	0,00E+00	-1,12E-08				
IRP <sup>2</sup>	[kBq U235 eq.]	3,80E-01	0,00E+00	1,80E-05	3,89E-03	0,00E+00	-1,57E-01				
ETP-fw <sup>1</sup>	[CTUe]	3,63E+01	0,00E+00	4,56E-02	2,28E-01	0,00E+00	-3,56E+00				
HTTP-c <sup>1</sup>	[CTUh]	5,80E-09	0,00E+00	9,32E-13	5,06E-11	0,00E+00	-1,19E-10				
HTTP-nc <sup>1</sup>	[CTUh]	5,81E-07	0,00E+00	4,98E-11	4,88E-09	0,00E+00	-5,69E-09				
SQP <sup>1</sup>	-	1,03E+03	0,00E+00	2,68E-02	1,36E-01	0,00E+00	-9,58E+00				
Caption		toxicity – cancer effects clared in scientific notat	lonizing radiation – huma ; HTP-nc = Human toxici ion, fx 1,95E+02. This nu he same as 1,12*10 <sup>-11</sup> ol	ty – non cancer eff Imber can also be	ects; SQP = Soil ( written as: 1,95*1)	Quality					
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.										
	does not consid	<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.									

RESSOURCE CONSUMPTION PER kg textile							
Parameter	Enhed	A1-A3	C1	C2	С3	C4	D
PERE	[M]	1,38E+02	0,00E+00	4,67E-03	1,20E-01	0,00E+00	-5,86E+00
PERM	[MJ]	5,88E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	[MJ]	1,44E+02	0,00E+00	4,67E-03	1,20E-01	0,00E+00	-5,86E+00
PENRE	[MJ]	1,02E+02	0,00E+00	6,44E-02	6,72E-01	0,00E+00	-9,67E+00
PENRM	[MJ]	2,94E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	[MJ]	1,05E+02	0,00E+00	6,44E-02	6,72E-01	0,00E+00	-9,67E+00
SM	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	[m³]	4,03E-01	0,00E+00	5,11E-06	4,70E-03	0,00E+00	-4,07E-03
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water						
Disclaimer	The numbers are declared in scientific notation, fx 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

#### 65% new wool, 23% recycled wool, 12% nylon

65% new wool, 23% recycled wool, 12% nylon

ADDITIONAL ENVIRONMENTAL IMPACTS kg textile							
Parameter	Enhed	A1-A3	C1	C2	С3	C4	D
HWD	[kg]	9,89E-06	0,00E+00	1,99E-13	5,35E-11	0,00E+00	-1,34E-09
NHWD	[kg]	2,64E-01	0,00E+00	9,81E-06	2,27E-02	0,00E+00	-1,86E-02
RWD	[kg]	3,77E-03	0,00E+00	1,20E-07	2,49E-05	0,00E+00	-9,29E-04
CRU	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	[kg]	1,06E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MER	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	[M]	3,69E-02	0,00E+00	0,00E+00	3,11E+00	0,00E+00	0,00E+00
EET	[M]	8,42E-02	0,00E+00	0,00E+00	5,59E+00	0,00E+00	0,00E+00
Disclaimer	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy						

BIOGENIC CARBON CONTENT PER kg of TEXTILE			
Parameter	Unit	45% New wool worsted 10% Nylon 45%	65% New wool worsted 12% Nylon 23%





		Recycled wool	Recycled wool
Biogenic carbon content in product	kg C	0,45	0,44
Biogenic carbon content in accompanying packaging	kg C	0,000014	0,000014

# Additional information

#### **LCA interpretation**

For the results in this EPD the consumption of natural gas outweighs the other components. Yarns and fibres used in the production are the second most impactful parameter, in part due to the significant contributions of waste arising during production, followed closely by the dyeing/finishing setup in question, and lastly the end-of-life incineration.

#### **Technical information on scenarios**

#### **Reference service life**

RSL information	Unit	
Reference service Life	10 years	
Declared product properties		
Design application parameters		
Assumed quality of work	Technical specifications and guidance can be	
Outdoor environment	obtained from the company's website <u>www.kvadrat.dk/en</u> or from direct contact to Kvadra at +45 8953 1866 or <u>kvadrat@kvadrat.org</u>	
Indoor environment		
Usage conditions		
Maintenance		

#### End of life (C1-C4)

Scenario information	Value	Unit
Collected separately	1	kg
Collected with mixed waste	0	kg
For reuse	0	kg
For recycling	0	kg
For energy recovery	1	kg
For final disposal	0	kg
Assumptions for scenario development	Assumed to be 100% incineration.	-

#### Re-use, recovery, and recycling potential (D)

Scenario information/Materiel	Value	Unit
Displaced material	3,11	MJ
Energy recovery from waste incineration	5,59	MJ



#### Indoor air

The products covered in the EPD are **GREENGUARD**® certified and comply with respective Indoor climate minimum requirements.

The **GREENGUARD**® certification ensures products do not exceed limits for dangerous substance emissions (VOCs) and thereby contribute to a healthier indoor climate.

The certificates and standards as well as the EU Ecolabel are available at the following link, by choosing a textile and selecting the Downloads section, after which the certificates are presented:

https://www.kvadrat.dk/en/products

#### Soil and water

The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A1 chapter 7.4.2.

However, selected Kvadrat products are EU Ecolabel certified, which guarantees limited use of substances harmful to the environment and health and reduced water and air pollution.



## References

Publisher	www.epddanmark.dk Template version 2022.2
Programme operator	Danish Technological Institute Sustainable Construction Gregersensvej DK-2630 Taastrup www.teknologisk.dk
LCA-practitioner	Danish Technological Institute Sustainable Construction Gregersensvej DK-2630 Taastrup www.teknologisk.dk
LCA software /background data	GaBi version 10.6, Database 2022.2 <u>www.gabi-software.com</u> EcoInvent version 3.8 <u>www.ecoinvent.org</u>
3 <sup>rd</sup> party verifier	Guangli Du BUILD – The Department of the Built Environment, Aalborg University

## General programme instructions

General Programme Instructions, version 2.0, spring 2020 www.epddanmark.dk

#### EN 15804

DS/EN 15804 + A2:2019 - "Sustainability of construction works – Environmental. product declarations – Core rules for the product category of construction products"

## EN 15942

DS/EN 15942:2011 – " Sustainability of construction works – Environmental product declarations – Communication format business-to-business."

#### ISO 14025

DS/EN ISO 14025:2010 – " Environmental labels and declarations – Type III environmental declarations – Principles and procedures"

#### ISO 14040

DS/EN ISO 14040:2008 – " Environmental management – Life cycle assessment – Principles and framework"

## ISO 14044

DS/EN ISO 14044:2008 – " Environmental management – Life cycle assessment – Requirements and guidelines"